


Specifications

Rated Input	AC100V - 240V 50/60Hz	
Rated Output	DC24V 1A	
Operating Ambient Temperature	0 - 40°C	
Storage Ambient Temperature	-10 - 70°C	
Mounting Location	Indoor Only	
Mass	AC Adaptor	123 ±15g
	AC Plug	UL:Approx.7g, VDE:Approx.15g, UK:Approx.16g, CCC:Approx.7g, KC:Approx.17g
	Extension Cord	Approx.38g
Conformity Standards and Certification	PSE UL Listed (File No.E163743) KC / CCC / BSMI U.S.Department of Energy(DOE) & California's Energy Efficiency Standards LEVEL VI Natural Resources Canada(Nrcan) Energy Efficiency Regulations Code of Conduct on Energy Efficiency of External Power Supply Version 5 (CoC Tier2) FCC Part 15 Subpart B class B EN 62368-1, EN 55032, EN 55035, EN IEC 63000	
Remarks	Conforms to the CE Requirements Conforms to the UKCA Requirements	

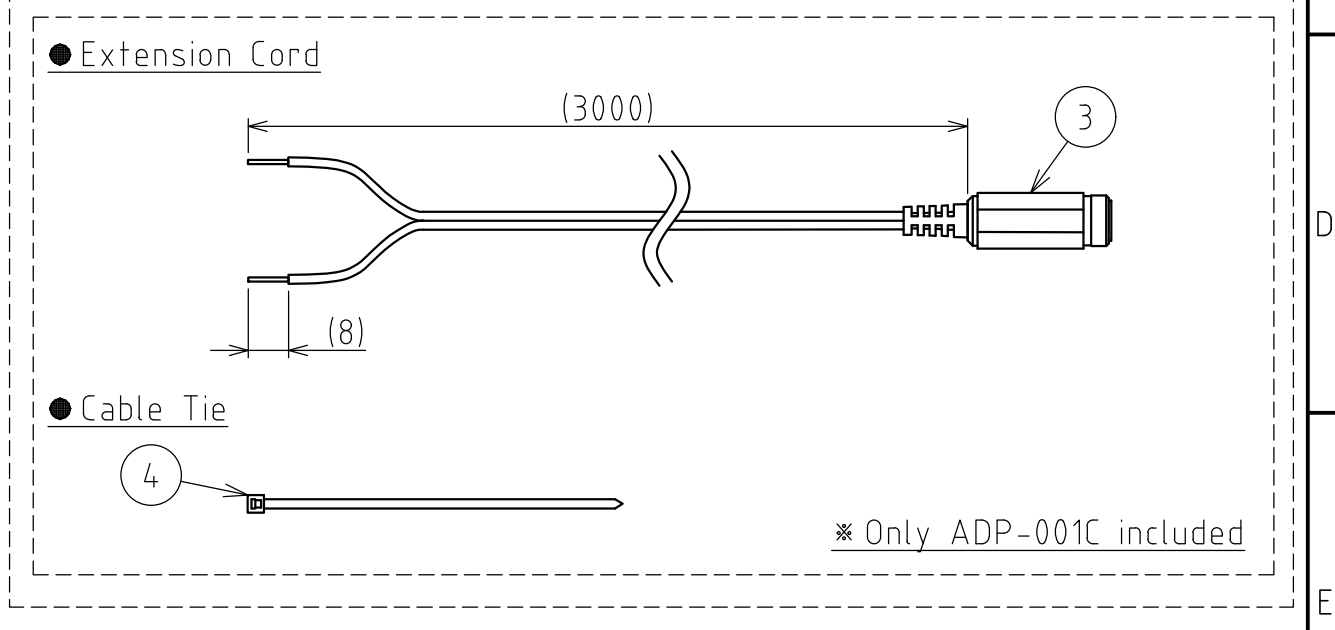

1	AC Adaptor	1	
2	AC Plug	5	UL, VDE, UK, CCC, KC
3	Extension Cord	1	UL2468 AWG22
4	Cable Tie	1	
番号 No.	部品名 Part Name	数量 Qty.	記事 Remarks
機種 Model	ADP-001(C)	特注 No. S.P.No. -	設計 Dgn.by Y. Azuma 19. May. '23 製図 Drn.by Y. Azuma 22. Nov. '23
図名 Name	Specifications		検図 Chkby Y. Fukumoto 11. Dec. '23 承認 App.by T. Kanki 12. Dec. '23
品目コード Part No.	-	尺度 Scale -	三角法 3rd Angle P. 単位 Unit mm 株式会社 PATLITE Corporation