


Specifications

Rated Input	AC100V - 240V 50/60Hz	
Rated Output	DC24V 1A	
Operating Ambient Temperature	0 - 40℃	
Storage Ambient Temperature	-10 - 70℃	
Mounting Location	Indoor Only	
Mass	AC Adaptor	123 ±15g
	AC Plug	UL:Approx.7g, VDE:Approx.15g, UK:Approx.16g, CCC:Approx.7g, KC:Approx.17g
Conformity Standards and Certification	PSE UL Listed (File No.E163743) EN 60950-1 / GS Mark Certification KC CCC BSMI	
	U.S. Department of Energy(DOE) & California's Energy Efficiency Standards LEVEL VI Natural Resources Canada(Nrcan) Energy Efficiency Regulations Code of Conduct on Energy Efficiency of External Power Supply Version 5 (CoC Tier2) FCC Part 15 Subpart B class B EN 55032, EN 55024 RoHS Directive(EN50581)	
Remarks	Conforms to the CE requirements	

Accessory (AC plug)

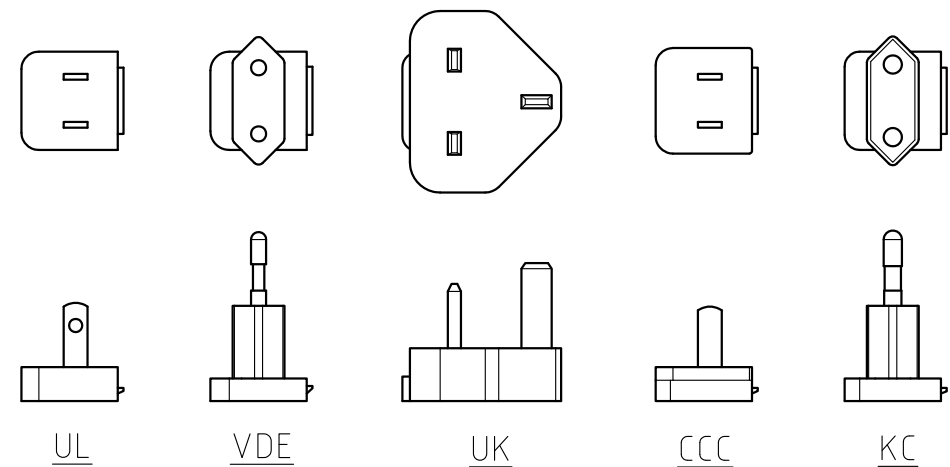

1	AC adaptor		1		
2	AC plug		5	UL,VDE,UK,CCC,KC	
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

製品仕様書 Specifications
株式会社 パトライト PATLITE Corporation
ADP-001-W18A