

**PATLITE®**

# WME-D

FLUSH-MOUNTED SIGNAL TOWER



Easy vertical and  
horizontal installation  
with mounting bracket

Superior durability  
and light transmission


# WME-D CONTINUOUS

# WME-DFB CONTINUOUS / FLASHING / AUDIBLE ALARM




## The Flush-Mounted Signal Tower

The WME Series features an 80mm diameter modular design, up to 5 ultra-bright LED units, and a 93dB audible alarm for effective signaling and enhanced durability.

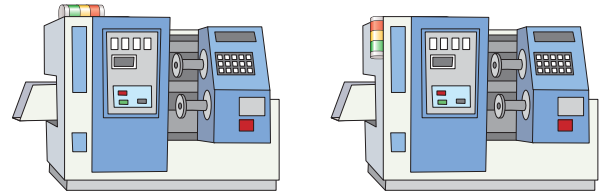


- Built-in audible alarm with up to 93dB
- Can be installed vertically or horizontally
- Easy to install with included metal fittings
- NPN/PNP compatible (NPN only for AC models)

## Dimensions

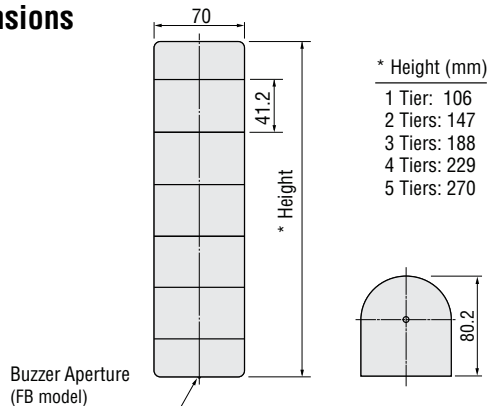

## Mounting Direction

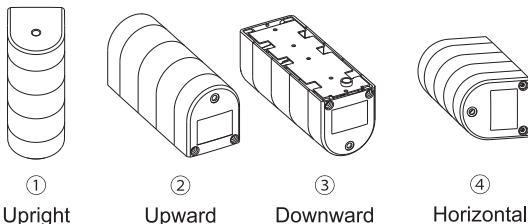

\* To maintain IP54 for FB model, install the unit with the buzzer aperture pointing down.

## Specifications

<b>Product Name</b>	Signal Tower
<b>Model</b>	WME-□02DFB
<b>Rated Voltage</b>	24V DC
<b>Operating Voltage Range</b>	Rated Voltage ± 10%
<b>Signal Wire Current / Power Consumption</b>	201mA Max (5 tier and alarm)
<b>Mounting Location</b>	Indoor Only
<b>Protection Rating</b>	IP54 (IEC 60529) (for upright mounting only)
<b>Vibration Resistance</b>	20m/s <sup>2</sup> (JIS C 60068-2-6)
<b>Alarm Sound</b>	Alarm1 - Rapid, Intermittent Beep (1/2620Hz) Alarm2 - Rapid, Intermittent Beep (2/2620Hz)
<b>Sound Pressure</b>	93dB
<b>Environmental</b>	Alarm1 - measured from front direction of alarm opening at 1m
<b>Conformity Standards</b>	UL 508, CSA-C22.2 No.14 RoHS Directive (EN 50581) EMC Directive (EN 61000-6-4) FCC Part 15 SubpartB Class A

## How to Order

## WME-502DFB-RYGBC

Model	Number of tiers	Rated Voltage	Specifications	Colors
02	24V DC	M2	100 - 240V AC	Blank
				Continuous
				FB
				Continuous / Flashing / Audible Alarm

R	Red
Y	Amber
G	Green
B	Blue
C	White

From Top to Bottom

## PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A.  
TEL.+1-310-328-3222 FAX.+1-310-328-2676 E-mail: sales@patlite.com

[www.patlite.com](http://www.patlite.com)