

PATLITE®

**Brilliant Illumination,
Broad Coverage**

Ideal for Workstations,
Machine Lighting
and Control Cabinets



CWF SERIES
LED WORK LIGHT



THE CWF LED WORK LIGHT Improve worker performance with effective work space illumination




VERSATILE OPERATION


Rocker Switch



Flexible mounting options




ILLUMINANCE DISTRIBUTION

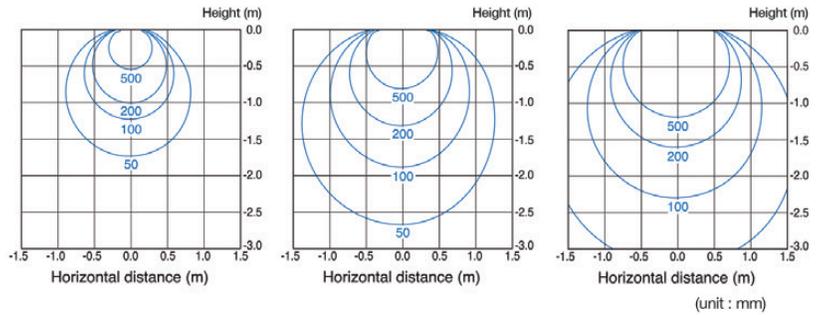


DIAGRAMS


LED Work Light

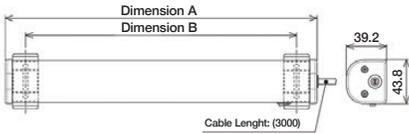

CWF Standard Mounting Bracket (2pcs)

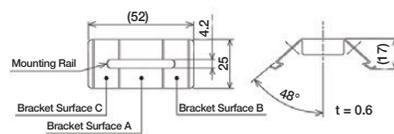

MODEL	Dimension A Body Length	Dimension A Bracket Pitch
CWF3S-□-CD	300	260
CWF3S-□-CD	600	560
CWF3S-□-CD	900	860

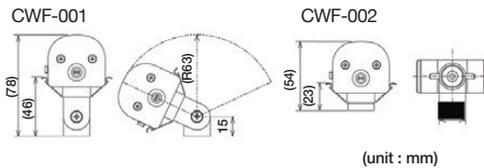

BRACKETS

Standard Mounting Bracket



Mounting screws not included.
Recommended Torque: 1.5Nm

Option Swivel Bracket CWF-001



Option Magnets for Mounting Bracket CWF-002



Accessory Bracket Screw
2pcs included.



Accessory Bracket Screw 2pcs included.
Mounting screws not included.

SPECIFICATIONS

MODEL	CWF3S-24	CWF6S-24	CWF3S-M2U	CWF6S-M2U	CWF9S-M2U
Color Temperature (typ.)	5700 K				
Illuminance (typ.) (Center) 1.0m	165 lx	320 lx	150 lx	320 lx	445 lx
Total Luminous Flux (typ.)	500 lm	1000 lm	500 lm	1000 lm	1500 lm
Rated Voltage	24V DC		100-240V AC (50/60Hz)		
Operating Voltage Range	21.6-26.4V DC		90-264V AC		
Rated Power Consumption	5W	10W	5W	10W	15W
Operating Ambient Temperature	-25 °C ~ + 60 °C		-55 °C ~ + 50 °C		
Operating Ambient Humidity	90% RH or less, no condensation				
Mounting Location	Indoor				
Mounting Direction	All Directions				
Protection Rating	IP20				
Mass (Tolerance 10%)	0.42 kg	0.57 kg	0.53 kg	0.68 kg	0.84 kg

HOW TO ORDER

TYPE	Full Length	Rated Voltage Standards	Luminous Color
CWF			CD

- 3S : 300mm
- 6S : 600mm
- 9S : 900mm

CD : Daylight

24 : 24V DC / UL LISTED, CE^{※1}

M2U : 100-240V AC / UL LISTED

※1 CWF 3S 6S type only

PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A.
TEL.+1-310-328-3222 FAX.+1-310-328-2676 E-mail: sales@patlite.com

www.patlite.com

• PATLITE and the PATLITE logo are either registered trademarks or trademarks of PATLITE Corporation in JAPAN and/or other countries.
• MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thomson Licensing.
• The names of other companies and products are trademarks or registered trademarks of their respective companies